







INSTALLATION INSTRUCTIONS

Troldtekt® acoustic panels and Troldtekt® Plus installed in exposed T24 profiles in removable, suspended ceiling system


These instructions apply to installation of Troldtekt® acoustic panels and Troldtekt® Plus in exposed T24 profiles in removable, exposed ceiling system.
Download installation instructions for Troldtekt® T24 profile system from www.troldtekt.com.

PROFILE DRAWINGS




Panel thickness 25 mm / 35 mm



Panel thickness 35 mm



Panel thickness 15 mm / 25 mm / 35 mm



Please note:
Troldtekt Plus 15 can only be used with K0-S


INSTALLATION

Check that all hangers are secure after installation of the profile system. Adjust if necessary. Now lay the Troldtekt panels in the grid.

Note: When installing **600 × 600 mm** square panels, it is important to ensure that the wood wool fibres run mainly parallel in one direction.

You can ensure that the panels face the same way by looking at the printed text on the back of the panels. This text must always face the same way.

ILLUSTRATION – INSTALLATION

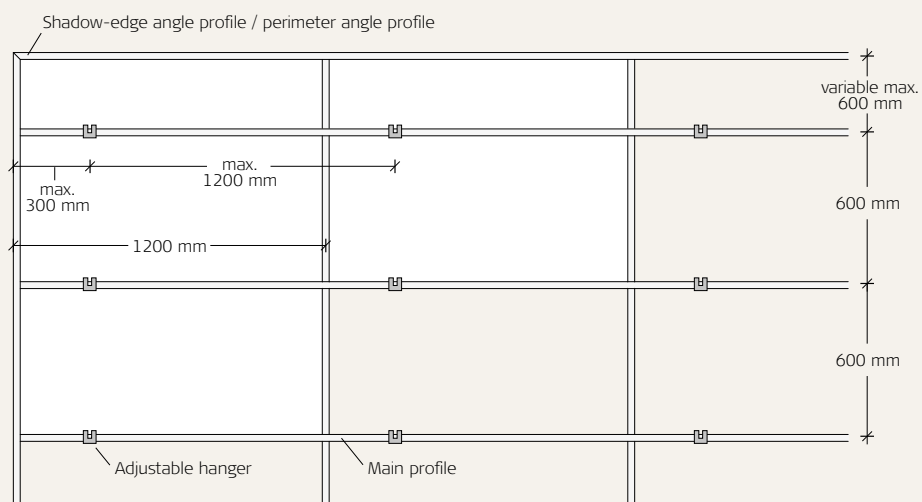

This document reflects Troldtekt's knowledge of certifications, standards, and products at the time of publication. No rights can be derived from this document. Changes, typesetting and printing errors reserved.

The most recent version can be found online by scanning the QR code.

MAY 2025 UK IE V01

Troldtekt Limited
Pembroke
Leominster

Herefordshire
HR6 9LA
United Kingdom

Tel +44 7555 176055
sales@troldtekt.co.uk www.troldtekt.co.uk